


COSIFLOR VS 2 ML





An overview of the details:

- Size range:

 (W x H) 200 x (follows) cm or
 (W x H) 160 x (follows) cm, max. area (follows) m²
- Fitting: for all common VS 2 fitting options
- Operation: with handle bar or operating rod
- Rail colours: white, grey, anthracite or black


The benefits of the COSIFLOR VS 2 ML:

- The ergonomically shaped handle bar has minimal deflection thanks to its optimised cross-section.
- The profile depth is 20.8 mm and is therefore also ideal for sliding doors.
- The magnetic fixing ensures a secure hold of the upper profile.


Processing:

- Only the extension of the assembling set for a VS-system and the rail clamps for the test boom are required for production.
- Cord diagramm according to VS 2 X.
- Can also be produced automatically on the PDU and the cording unit.

Fitting options:

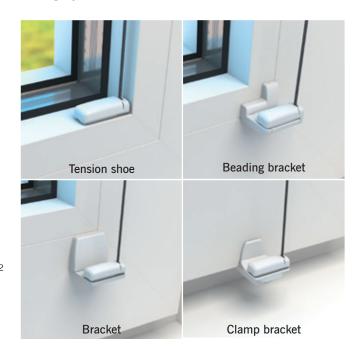

The **adaptor for the tension shoe** ensures that it is always aligned parallel to the magnet in window beading up to 15° and that the rail is straight.

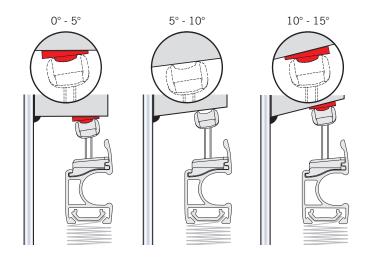



Get in touch with us!

Blöcker Zweigniederlassung der Hunter Douglas Holding GmbH & Co. KG Norderneystraße 3 | 28217 Bremen | Germany Tel. +49 421 38 69 20 | www.bloecker.de